


LEFTHAND OPERATOR

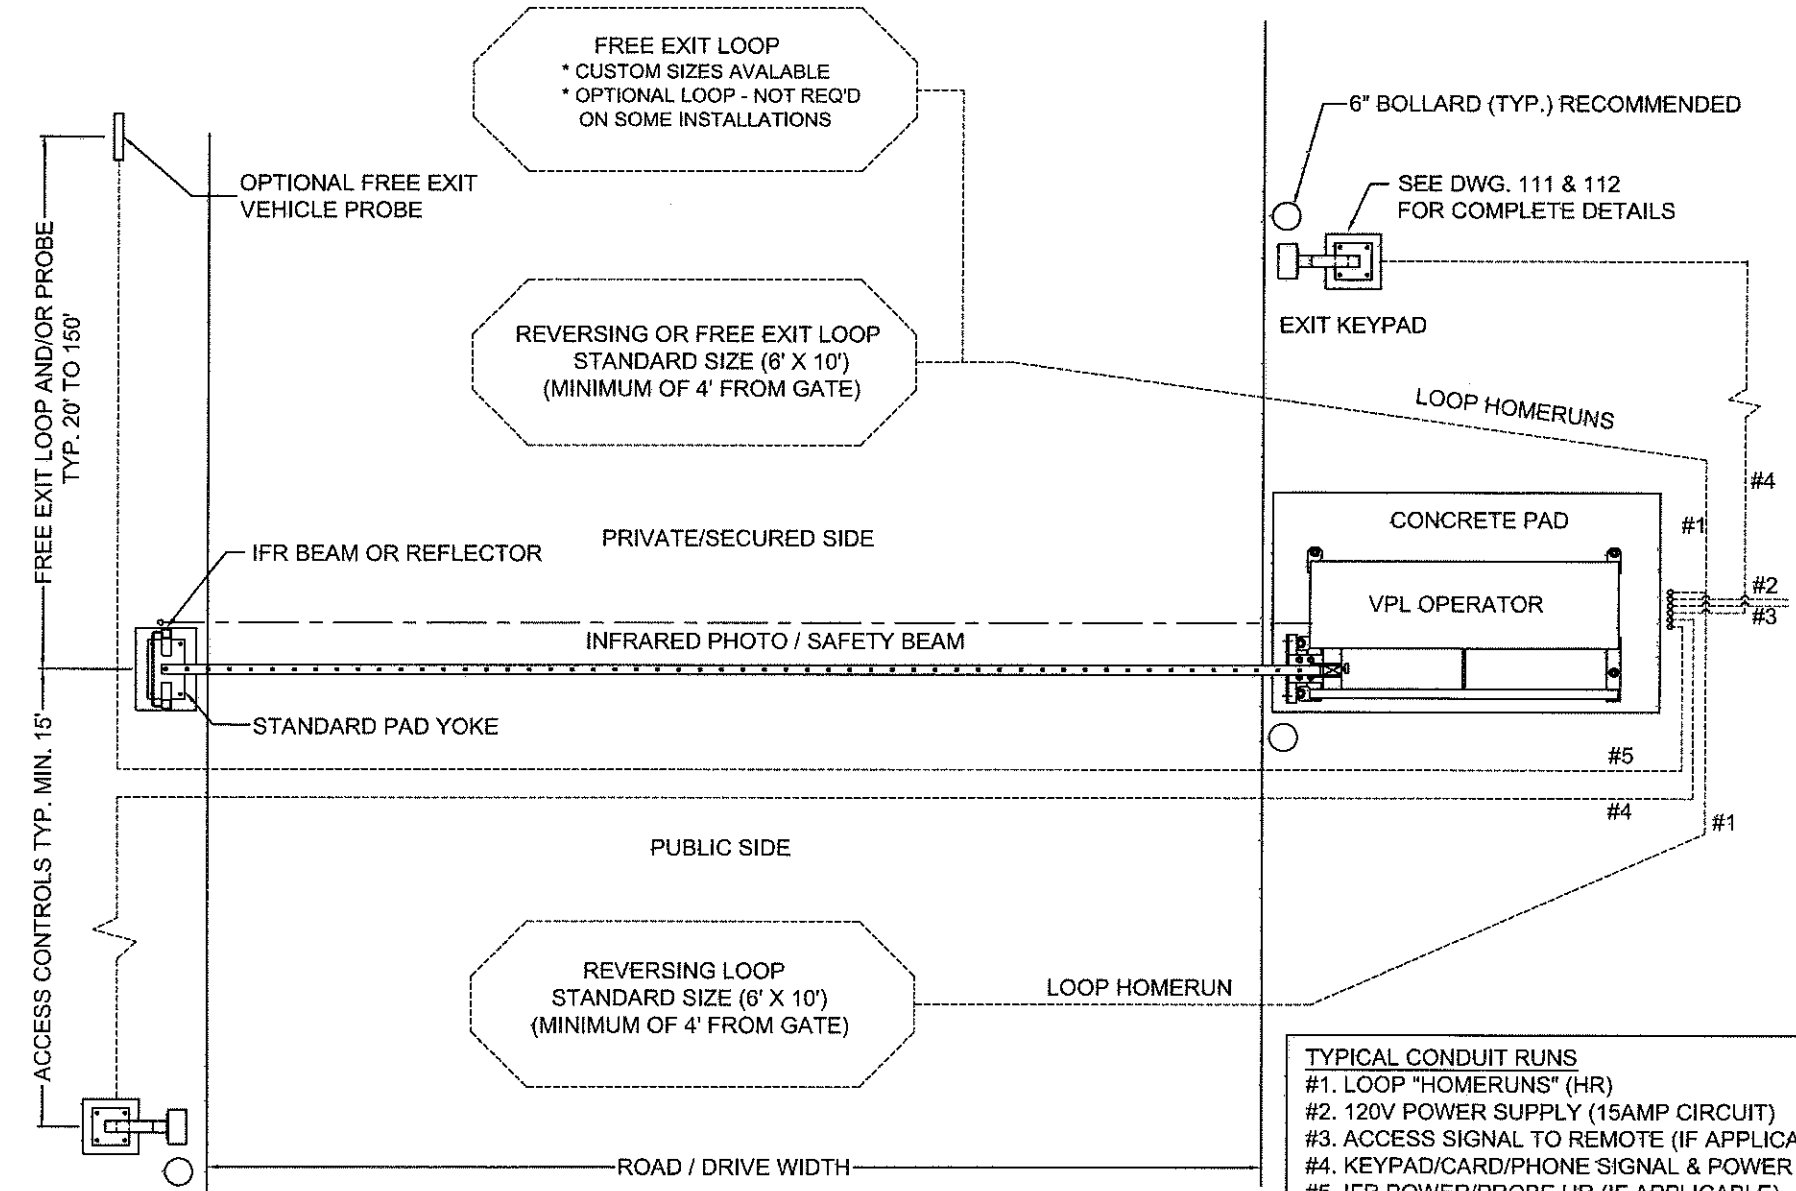

ENTRANCE KEYPAD NORMALLY, GATE LENGTH MUST EXCEED THIS WIDTH BY AT LEAST 12"
 (FOR CURB APPLICATIONS - SEE: DWG. # 120-C & 151-R)

- TYPICAL CONDUIT RUNS**
- #1. LOOP "HOMERUNS" (HR)
 - #2. 120V POWER SUPPLY (15AMP CIRCUIT)
 - #3. ACCESS SIGNAL TO REMOTE (IF APPLICABLE)
 - #4. KEYPAD/CARD/PHONE SIGNAL & POWER
 - #5. IFR POWER/PROBE HR (IF APPLICABLE)

NOTICE
 THE INFORMATION CONTAINED
 ON THIS DOCUMENT IS
 CONFIDENTIAL. ANY
 DISSEMINATION, UNAPPROVED
 DISCLOSURE OR COPYING OF
 THIS INFORMATION IS
 STRICTLY PROHIBITED

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 ANGLES ± 1°
 XX ± 1/32, XXX ± .01, XXXX ± .005

Date: 12/20/05
 Dr. By: MKS
 Ckd. By: DMR
 Dwg.: 100-L
 Title: Operator & Accessory Site Layout (L/H)



DO NOT SCALE					
Rev.:	Description:	Date:	Drn. By:	Ckd. By:	
A	UPDATED DRAWING	01/22/13	SLD	KLL	